


## **NON ESD KAPTAN TAPE (60Mic)**

### **Polyimide Tape With Silicon Adhesive**

Polyimide film coated with high temperature resistant silicone pressure sensitive adhesive. Aggressive adhesion, high temperature resistance, good protection. Applicable to printed circuit board (PCB) and protecting to gold fingers and all kinds of insulation in wave soldering tin stove.

#### ◆ **Composition**

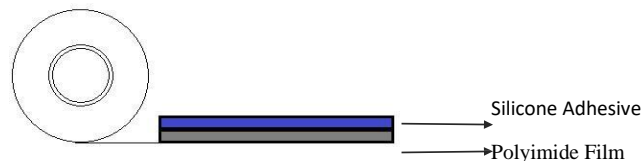

#### ◆ **Feature**

- ◇ Polyimide film as carrier, high temperature resistance, good insulation performance;
- ◇ Silicone pressure sensitive adhesive, good high temperature resistant;
- ◇ Surface protection without adhesive residue.

#### ◆ **Application**

- ◇ Protection for PCB
- ◇ Sticking during SMT process;
- ◇ Cable insulation.



**NON ESD KAPTAN TAPE (60Mic)**

**◆ Performance Parameter**

| Article                  | Parameter                 |
|--------------------------|---------------------------|
| Type of Adhesive         | Silicone                  |
| Total Tape Thickness/mic | 60                        |
| Backing Thickness/mic    | 25                        |
| Carrier                  | Polyimide Film            |
| Adhesion Strength/N/25mm | ≥4.5                      |
| Initial Tack/mm          | <30                       |
| Holding Power/h          | ≥48                       |
| Temperature Resistance   | 260°C                     |
| Insulating Voltage/KV    | ≥4.5                      |
| Jumbo Roll Size          | 520/500mm x 2000m,        |
| Log Roll Size            | 500mm x 66m, 500mm x 33m, |